


red kite

IMPORTANT READ CAREFULLY
AND KEEP FOR FUTURE REFERENCE

Instruction leaflet

LIFT
Booster

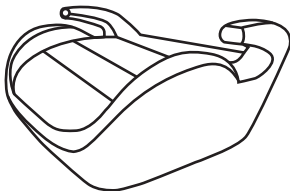


Suitable for children from 125 – 150cm

This is a Universal booster cushion Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use in i-Size compatible and universal vehicle seating positions as indicated by vehicle manufacturer in the vehicle user's manual. If in doubt, consult the Enhanced Child Restraint System manufacturer or the retailer.

Customer Care: www.redkitebaby.co.uk

LIFT Booster Safety Instructions

PARTS

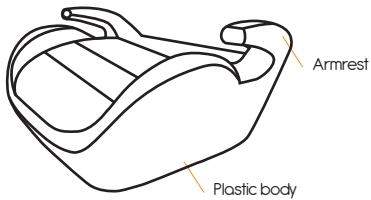


IMPORTANT SAFETY INFORMATION

METHOD	DIRECTION	SIZE RANGE	INSTALLATION	TYPE
1	Forward	125 – 150cm	3-point belt	Universal booster cushion




Forward facing installation



Only forward facing installation permitted.

Positioning in car



Positions marked in green are suitable for use with a 3-point safety belt. The recommended position is on the rear seat.

This child car seat is suitable for children from 125cm to 150cm.



The product can only be used in a vehicle that is fitted with a 3 point safety belt approved to ECE-16 or the equivalent standard. Never use a 2 point safety belt. The booster cushion must only be installed by using a lap and diagonal safety belt.

METHOD 1 INSTALLATION IN THE VEHICLE WITH A 3 POINT SAFETY BELT



- ① Place the booster cushion on the vehicle seat. Ensure the booster cushion is firmly pressed against the back of the vehicle seat. Place the child on the booster cushion, ensuring their back and waist is fully in contact with the backrest of the vehicle seat.

- ② Pass the lap section of the safety belt over the child's lap, making sure it goes under the armrest on both sides of the seat. Position the lap belt low on the child's lap, securely resting over the pelvis.



- ③ The diagonal belt must go above the armrest while the lap belt goes under the armrest. Make sure the safety belt is not twisted.

It is important that the safety belt crosses the middle of the shoulder and is tight across the lap. Ensure that the lap section is worn low down and firmly engaged with the pelvis. The diagonal belt must pass over the child's shoulder and NOT across the neck.

Once it is guided and located correctly, clip the vehicles safety belt into the buckle until you hear it click.

REMOVING THE BOOSTER SEAT COVER



Detach the seat cover from the plastic body by following the direction of the arrow.



The seat cover is a safety feature.
Never use the booster cushion without it.

REFITTING THE SEAT COVER

To reattach the seat cover, follow the previous instructions in reverse order.

CARE INSTRUCTIONS FOR CHILD CAR SEAT

Fabric Cover Care:

The fabric cover can be machine washed on a 30°C cycle.
Do not bleach, tumble dry, iron, or dry clean the fabric.
Excessive rubbing may damage the surface and sponge layer.

Plastic Body Care:

Do not expose the child car seat to corrosive substances.
For cleaning the plastic body, use a wet towel and air dry.


SAFETY INFORMATION FOR VEHICLE SAFETY BELTS

Ensure the safety belt is placed in the green area.



The shoulder position belt hook must be adjusted so that the shoulder straps are at the same level as your child's shoulders.

(Shown in green).

Pull tightly.



Ensure the safety belt is on the child's pelvis.



Ensure that the safety belt has passed through the shoulder belt hook and waist belt guide groove at the same time.

SAFETY INFORMATION

- Read the entire instruction manual thoroughly before using the child car seat. Improper installation can endanger your child's life.
- Ensure the safety belt is correctly routed.
- Never make alterations or additions to the product.
- Do not continue using the child seat if any parts are damaged or loosened after an accident.
- Do not leave children unattended in the car seat.
- Properly secure any luggage or objects that could cause injury in a collision.
- Never use the child car seat without the cover.
- Child car seat parts may become hot in direct sunlight. Cover the seat with a sheet to prevent this.
- Make sure all other passengers, luggage, and loose objects are properly secured.
- The child car seat must be secured with the vehicle safety belt when not in use.
- In an emergency, you can quickly release your child by pressing the red button on the vehicle seat belt buckle.
- Store the child car seat in a safe place when not in use, avoiding placing heavy objects on it.
- Most accidents occur during short trips, so always use the seat, even on short journeys.
- Ensure the vehicle safety belt is adjusted to the proper position and that the belt is not twisted.
- Do not use this product second-hand, as you cannot know its history.

Manufactured by:

The Red Kite Baby Co Ltd. 35 Lavenham Road, Beeches Industrial Estate,
Yale, Bristol, BS37 5QX. UK.

Authorized Representative:

Mum n Me. Triq is-Suq, Zejtun, ZTN1420. Malta.

